


Auto-locking Back Up Device RA2



Instructions for use with a two-person load
(max. 250kg) in the event of a rescue.

These instructions should be read together with the main user instruction manual which accompanies the product.

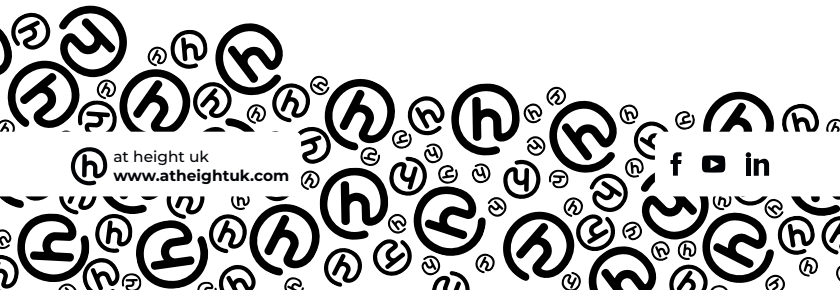

at height uk
www.atheightuk.com

f t in

Introduction

EN12841:2024 limits the use of devices to ONE PERSON only.

However, Type A back-up devices should be capable of protecting two persons in the event of a working line failure e.g. during a rescue.

When factory tested extensively with a load of 250kg (using 10.5mm and 11mm EN1891A rope) the RA2 performs as follows:


- Average Locking Distance @ <10cm
- Average impact force @ <6kN
- No visible damage to rope sheath after any test

Therefore, it is clear the RA2 is suitable for use in protecting 2 persons in the event of a rescue however the manufacture recommends the RA2 is ALWAYS POSITIONED $\leq$ FF1.

Clearance Calculation

Recommended minimum clearance in the event of a working line failure.

FF1

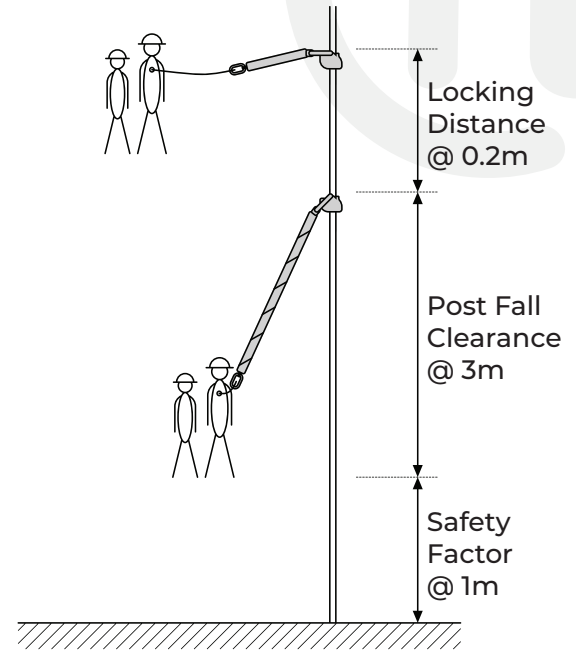

The recommended clearance is therefore 4.2m, however this information is only provided as a guide as a Competent Person should fully risk assess each scenario.

The RA2 is a device manufactured by SKYER
(Beijing) Industry Technology Co.
and officially distributed by:



at height uk

www.atheightuk.com

